

# **Electric Self-propelled Scissor Lift**

**GS-1532  
GS-1932**

Nothing beats  
a Genie Scissor  
for performance,  
safety, serviceability  
and value.



**Genie Industries**

## GS-1532 and GS-1932

- The solid steel deck platform has a **slip-resistant surface**.
- Heavy duty tubular steel guardrails **maximise durability**. Telescopic end rail can be raised to **accommodate large loads**.
- **Lubrication-free, service-free pivot points**.
- **Built-in lanyard attachment points**.
- The ergonomic Joystick Controller operates from the platform or the ground.
- **Low noise level** allows operation in quiet work environments.
- High angle steering provides **excellent manoeuvrability**.
- Swing-out battery box and power module allow **easy access to componentry**.

- Variable speed motor **extends battery and motor life** by using only the energy needed to do the required work.
- On-board troubleshooting diagnostics **notify the operators of possible fault conditions**.

## Standard Features

- GS-1532 has 6.6 m (21 ft) working height and GS-1932 has 7.8 m (25 ft) working height
- 91 cm (36 in) roll-out platform extension
- Narrow 81.3 cm (32 in) width
- 272 kg (600 lb) lift capacity for the GS-1532 and 227 kg (500 lb) lift capacity for the GS-1932
- Compact design
- Automatic 25 amp battery charger
- Proportional controls for lift and drive functions
- Multiple disc brakes provide smooth deceleration
- Drive speed interlock limits speed while elevated
- Emergency stop at both platform and ground controls
- Manual platform lowering valve
- Manual brake release
- Pothole guards
- Non-marking tyres
- Tilt level sensor with an audible alarm
- Beeper horn
- Hour meter
- Simple and reliable load sensing system

## Options and Accessories


- Motion alarm
- Air line to platform
- Platform swing gate
- Dual flashing beacon
- Maintenance-free battery

## Standards Compliance

- CE EN280
- AS1418.10

## Occupancy Rating

- Indoor: 2 persons (GS-1532, GS-1932)
- Outdoor: 1 person (GS-1532, GS-1932)

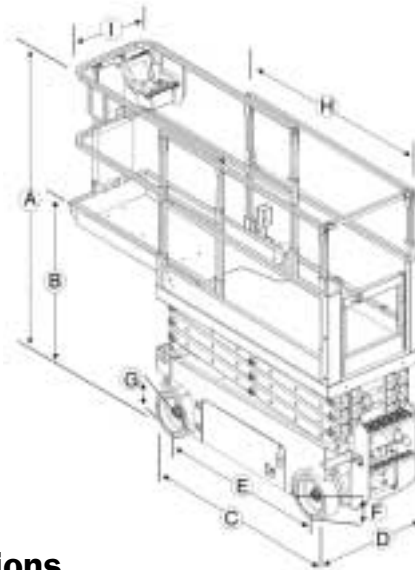

## Specifications

Model	GS-1532 Metric	US	GS-1932 Metric	US
Working height *	6.6 m	21 ft	7.8 m	25 ft
Platform height	4.6 m	15 ft	5.8 m	19 ft
(A) Height-stowed (guardrails)	2.02 m	79½ in	2.11 m	83 in
(B) Height-stowed (platform)	97 cm	38.2 in	1 m	39.5 in
Unit height - stowed	2.02 m	79½ in	2.11 m	83 in
Fold down railing design				
Unit height, stowed, rails folded	1.73 m	68 in	1.76 m	69.3 in
(C) Length-stowed	1.82 m	71.5 in	1.82 m	71.5 in
(D) Width	81.3 cm	32 in	81.3 cm	32 in
(E) Wheelbase	1.32 m	52 in	1.32 m	52 in
(F) Ground clearance	6.1 cm	2.4 in	6.1 cm	2.4 in
(G) Ground clearance - Pothole guards deployed	1.9 cm	0.8 in	1.9 cm	0.8 in
(H) Platform length-outside	1.64 m	64.4 in	1.64 m	64.4 in
(I) Platform width-outside	74 cm	29.3 in	74 cm	29.3 in
Platform length-extended	2.54 m	100 in	2.54 m	100 in
Guardrail height	1.1 m	43.4 in	1.1 m	43.4 in
Toeboard height	15 cm	6 in	15 cm	6 in
Lift capacity	272 kg	600 lb	227 kg	500 lb
Turning radius outside	1.55 m	61 in	1.55 m	61 in
Turning radius inside	zero		zero	
Power source	24V (4 6V 245AH batteries) (both models)			
Drive speed - stowed (max.)	4 km/h	2.5 mph	4 km/h	2.5 mph
Drive speed - raised (max.)	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Raise/lower speed	16/17 sec		16/23 sec	
Controls	proportional		proportional	
Tyres (solid rubber, non-marking)	30 x 11 x 20 cm (12 x 4.5 x 8 in) (both models)			
Gradeability	30%		30%	
Drive	dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Pothole protection	standard		standard	
Weight - CE **	1,238 kg	2,729 lb	1,503 kg	3,314 lb

\* The metric equivalent adds 2m to platform height, US adds 6ft to platform height.

\*\* Weight will vary depending on options and/or country standards.

Distributed By:

# Genie Industries™

### GENIE AUSTRALIA

591 Boundary Road, Darra Qld 4076  
PO Box394, Richlands Qld 4077  
Telephone **07 3375 1660**  
Fax 07 3375 1002  
<http://www.genieindustries.com>

### GENIE UNITED STATES

18340 NE 76th Street, P.O. Box 97030  
Redmond, Washington 98073-9730  
Telephone **(425) 881-1800**  
Toll Free in USA/Canada **800-536-1800**  
Fax (425) 883-3475  
<http://www.genieindustries.com>